

# Data Sheet

## Select Series of Solid Vinyl Siding



*Unique Beaded and Vertical Siding*

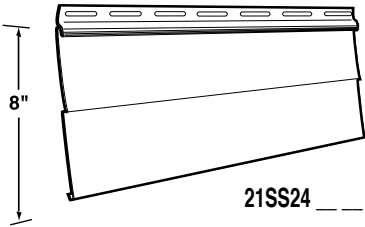
Illustration	Description/Packaging	Colors/Color Nos.
 <p>21SS24</p>	<p><b>Double 4" Siding Panel</b>            Soft Matte Finish            Length 12' - 6"            24 Panels/Carton            2 Sq./Carton            Carton Weight: 91 lbs.</p>	<p>White Birch (02)      Summer Wheat (26)            Classic Sand (11)      Harbor Stone (44)            Warm Sandalwood (17)      *Vintage Sage (55)            Sunny Maize (22)      *Adobe Clay (60)</p>
<p><b>NOTE:</b> Non-stocking item, 200 Squares minimum order, per color</p>		


Illustration	Description/Packaging	Colors/Color Nos.
 <p>21SS65BD</p>	<p><b>6.5" Beaded Siding Panel</b>            Soft Matte Finish            Length 12' - 4"            30 Panels/Carton            2 Sq./Carton            Carton Weight: 97 lbs.</p>	<p>White Birch (02)      Summer Wheat (26)            Classic Sand (11)      Harbor Stone (44)            Warm Sandalwood (17)      *Vintage Sage (55)            Sunny Maize (22)      *Adobe Clay (60)</p>



Illustration	Description/Packaging	Colors/Color Nos.
 <p>21BB70</p>	<p><b>Board &amp; Batten Siding Panel</b>            Deep Cedar Woodgrain Finish            Length 10'            17 Panels/Carton            1 Sq./Carton            Carton Weight: 53 lbs.</p>	<p>White Birch (02)      Harbor Stone (44)            Classic Sand (11)      *Vintage Sage (55)            Warm Sandalwood (17)      *Adobe Clay (60)            Sunny Maize (22)            Summer Wheat (26)</p>

Illustration	Description/Packaging	Colors/Color Nos.
 <p>21SS333</p>	<p><b>Triple 3" Siding Panel</b>            Soft Matte Finish            Length 12'            20 Panels/Carton            2 Sq./Carton            Carton Weight: 73.30 lbs.</p>	<p>White Birch (02)      Harbor Stone (44)            Classic Sand (11)      *Vintage Sage (55)            Warm Sandalwood (17)      *Adobe Clay (60)            Sunny Maize (22)            Summer Wheat (26)</p>
<p><b>NOTE:</b> Non-stocking item, 200 Squares minimum order, per color</p>		

\*Premium colors made with Armor Coat UVA™

---

## Select Series Solid Vinyl Siding

RMC Vinyl Siding passes or exceeds all industry standards per ASTM D3679.

---

### Product Test Data

Siding Thickness.....	.044" ± .001"	Impact Resistance.....	Passes per ASTM D3679
Board & Batten Thickness.....	.048" ± .001"	Surface Distortion @ 140°F.....	0
Specific Gravity.....	1.45	Fire Rating.....	Class A
Tensile Strength (PSI).....	7,154	Flame Spread Index.....	10
Tensile Modulus (PSI).....	416,900	Smoke Developed.....	395
IZOD Impact Strength @ 32°F.....	Passes per ASTM D3679	Fuel Contribution.....	0
Heat Deflection Temp. @ 264 PSI.....	169°F	Average Time Of Burning.....	Self extinguished
Coefficient of Linear Expansion.....	3.30 x 10 <sup>-5</sup>	Average Extent Of Burning.....	2.379 mm
Weight.....	47 lbs. per square	Weathering.....	Passes per ASTM D3679
Warpage.....	0.00"	Windload Rating* .....	162 MPH
Heat Shrinkage.....	0.3%		*(Wind Velocity based on IBC)



Style Crest, Inc.  
2450 Enterprise St.  
Fremont, Ohio 43420  
[www.rmcsiding.com](http://www.rmcsiding.com)

Select Series Data



Made in the U.S.A. by America's dedicated workforce.

Printed in the U.S.A. Specifications are subject to change without notice.

06/25/10 © Copyright 2010



Consult the VSI website at [www.vinylsiding.org](http://www.vinylsiding.org) for a current list of certified products and colors.